

## A timed perfection



# Electronic timer

Answers for industry.



### Introduction

Siemens offers 3RP15 electronic timers which meet the various control timing requirements of industry. These timers comply with IEC 60 947-5-1 IEC 61 000-6-2/EN 50 081-1 (EMC) Carry CE marking

#### Range

| ON delay:      | <b>Control supply voltage options -</b><br>Discrete voltages<br>Universal voltage of 24 to 240V ac/dc   |  |  |  |
|----------------|---|--|--|--|
|                | <b>Time ranges</b> - 0.5 -10 sec, 5 - 100 sec<br>Universal time range of 0.05 sec to 100Hr  |  |  |  |
| OFF delay:     | Control supply voltage options -<br>Discrete voltages   |  |  |  |
|                | Time ranges - 0.5 - 10 sec, 5 - 100 sec   |  |  |  |
| Star Delta:    | <b>Control supply voltage options -</b><br>Discrete voltages<br>Universal voltages of 200 - 240V ac/dc,<br>380 - 440Vac/dc and 230 - 400V ac/dc |  |  |  |
|                | Time ranges - 3 - 60sec with 50 msec changeover delay   |  |  |  |
| Multifunction: | 1 timer 8 functions (ON delay, OFF delay, ON+OFF<br>delay, Cyclic, Make Contact, Break contact, Pulse<br>shaping, Additive ON delay)            |  |  |  |

Control supply voltage options -

Universal voltage of 24 - 240V ac/dc

**Time ranges -** Universal time range - 0.05 sec to 100Hrs

### Application

3RP15 electronic timers can be used for all delayed switching applications in control, starting and protection circuits. They are ideal for use in application like machine tools, material handling, process control and motor control.

With multifunction timer, you can configure the same timer as per your application need. Thus one timer is suited for many applications (refer timing diagram)

### **Benefits**

- **Reduction in inventory** cost (upto 80%) due to universal time and universal voltage ON delay timers.
- **High accuracy** (<±1% repeat accuracy & <±5% setting accuracy) and switching reliability.
- High mechanical endurance of 30x10<sup>6</sup> operations ensures trouble free operation
- Integral surge suppression No voltage surges during switching makes them ideal for use with electronic circuits
- Clear visual **status indication** through 2 separate LEDs both for actuation of control supply and the change over status.
- High level of Electromagnetic compatibility (EMC) i.e. maximum immunity to interferences.
- No more failures of contactors in Star Delta starting during changeover

• Sleek 22.5mm wide housing and compact design saves panel space.

Thus 3RP timers ensure unmatched reliability and offer excellent 'Value for Money'  $% \mathcal{A}^{(1)}$ 

#### Note

- Changing the time setting ranges and the functions will only be effective when carried out in de-energised (OFF) state.
- Start input B1 or B3 must only be triggered when the supply voltage is applied.
- OFF delay timers are with aux. voltage (refer wiring diagram fig.1). Same potential must be applied to A1 and B1, or A3 and B3.
- With the two-voltage version, only one voltage range must be connected.
- The activation of loads parallel to the start input is not permissible when using AC control voltage (see diagram below).





Fig.1

#### Mounting

3RP electronic timers are suitable for snap mounting onto 35 mm standard DIN rails. Accessory for mounting 3RP timers on base plate is available and can be ordered separately.


#### Layout

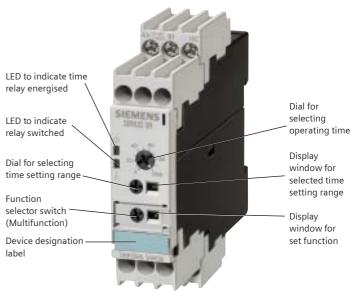

#### **Technical data**

| Туре   |                                    |                         | 3RP15 05<br>3RP15 31<br>3RP15 33   | 3RP15 11<br>3RP15 13<br>3RP15 25 | 3RP15 76 |
|--|------------------------------------|-------------------------|--|----------------------------------|----------|
| <b>Rated insulation voltage</b> (Pollut<br>Overvoltage category III acc. to D  | V AC                               | 300                     |  |                                  |          |
| Permissible ambient temperatu  | re during operation during storage | °C<br>°C                | -25 to +60<br>-40 to +80   |                                  |          |
| Mechanical endurance   | operating<br>cycles                | 30 x 10 <sup>6</sup>    |  |                                  |          |
| Rated operational currents le<br>AC-15 at 230 V AC, 50 Hz<br>DC-13 at 24 V<br>DC-13 at 110 V<br>DC-13 at 230 V   | A<br>A<br>A<br>A                   | 3<br>1<br>0.2<br>0.1    |  |                                  |          |
| Control voltage tolerance  |                                    | V<br>Hz                 | 0.85 - 1.1 x U $_{\rm s}$ for AC 50/60Hz; 0.8 - 1.25 x U $_{\rm s}$ for 24VDC 0.95 to 1.05 x rated frequency |                                  |          |
| <b>Operating frequency</b><br>at rated current le, 230 V AC  |                                    | 1/h                     | 2500   |                                  |          |
| Setting accuracy referred to upper limit of scale<br>Repeat accuracy   |                                    |                         | < ±5%<br>< ±1%   |                                  |          |
| <b>Recovery time</b><br>Minimum ON period  |                                    | ms<br>ms                | 150<br>35  | -                                | 150<br>- |
| Degree of protection   | cover<br>terminals                 |                         | IP 40<br>IP 20   |                                  |          |
| Rated power<br>Power consumption at 230 V AC, 50 Hz  |                                    | W<br>VA                 | 2<br>6   |                                  |          |
| Rated control fuse - Utilization category gL/gG  |                                    | А                       | 4  |                                  |          |
| Permissible mounting position  |                                    |                         | any  |                                  |          |
| Conductor cross-sections –<br>main / auxiliary conductors<br>solid<br>finely stranded with end sleeve<br>solid or stranded AWG conductors<br>terminal screw<br>tightening torque |                                    | mm²<br>mm²<br>AWG<br>Nm | 1x(0.5-4), 2x(0.5-2.5)<br>1x(0.5-2.5), 2x(0.5-1.5)<br>2x(20-14)<br>M3<br>0.8 to 1.2                          |                                  |          |


### **Timing Diagrams**

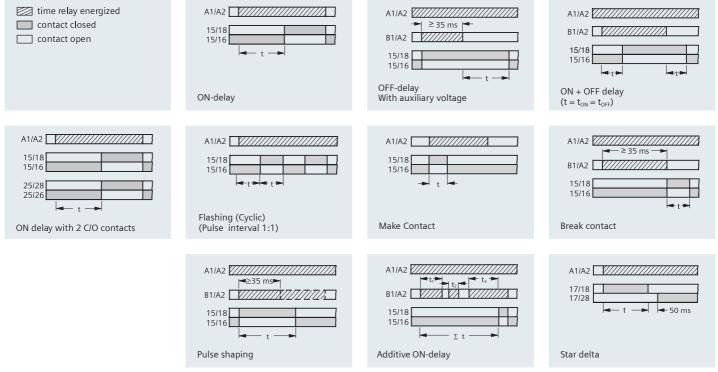

#### Selection and ordering data


| Time range                                    | Control Voltage                                       |                | Auxiliary<br>contacts      | Туре                                   |  |  |  |
|---|---|----------------|----------------------------|--|--|--|--|
|   |   |                |                            |  |  |  |  |
|   | AC (50/60Hz)  | DC             |                            |  |  |  |  |
| ON Delay timers                               |   |                |                            |  |  |  |  |
| 0.5 - 10 sec                                  | 24/100-127<br>24/200-240                              | 24<br>24       | 1 C/O<br>1 C/O             | 3RP15 11-1AQ30 8K<br>3RP15 11-1AP30 8K |  |  |  |
| 5 - 100 sec                                   | 24/100-127<br>24/200-240                              | 24<br>24       | 1 C/O<br>1 C/O             | 3RP15 13-1AQ30 8K<br>3RP15 13-1AP30 8K |  |  |  |
| 0.05sec to 100Hrs<br>(15 time setting ranges) | 24/100-127<br>24/200-240                              | 24<br>24       | 1C/O<br>1C/O               | 3RP15 25-1AQ30 8K<br>3RP15 25-1AP30 8K |  |  |  |
|   | 24 - 240  | 24 - 240       | 2C/O                       | 3RP15 25-1BW30 8K                      |  |  |  |
| OFF Dealy timers                              |   |                |                            |  |  |  |  |
| 0.5 - 10 sec                                  | 24/100-127<br>24/200-240                              | 24<br>24       | 1 C/O<br>1 C/O             | 3RP15 31-1AQ30 8K<br>3RP15 31-1AP30 8K |  |  |  |
| 5 - 100 sec                                   | 24/100-127<br>24/200-240                              | 24<br>24       | 1 C/O<br>1 C/O             | 3RP15 33-1AQ30 8K<br>3RP15 33-1AP30 8K |  |  |  |
| Multifunction timer <sup>1)</sup>             |   |                |                            |  |  |  |  |
| 0.05sec to 100Hrs<br>(15 time setting ranges) | 24 - 240  | 24 - 240       | 1C/O                       | 3RP15 05-1AW30 8K                      |  |  |  |
| Label set - 8 functions                       | On delay, Off de<br>pulse make con<br>pulse shaping a | 3RP19 01-0A 8K |                            |  |  |  |  |
| Star Delta timers                             |   |                |                            |  |  |  |  |
| 3 - 60 sec                                    | 24/100-127<br>24/200-240                              | 24<br>24       | 1NO inst. &<br>1NO delayed | 3RP15 76-1NQ30 8K<br>3RP15 76-1NP30 8K |  |  |  |
|   | 200-240/380-440V AC                                   |                |                            | 3RP15 76-1NM20 8K                      |  |  |  |
|   | 230-400V AC   |                |                            | 3RP15 76-1NP20 8K                      |  |  |  |
| Accessory                                     |   |                |                            |  |  |  |  |
| Push-in lug (for screw mour                   | 3RP19 03 8K   |                |                            |  |  |  |  |
|   |   |                |                            |  |  |  |  |

#### Wiring diagrams

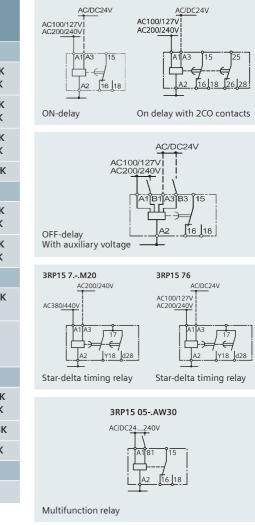


1) Please order label set alongwith multifunction timer (one per timer)

#### **Dimensions**



#### 1 C/O contact without auxiliary voltage and star delta timer

1) Push-in lug (for screw mounting on a base plate) for 3RP15



1 and 2 C/O contacts, with auxiliary voltage

Siemens Ltd. Industry Sector Control and Global Components R&D Technology Centre Kalwa Works, Thane Belapur Road, Thane - 400 601 Fax: +91 22 27645627 E-mail: lvsgr-mktg.india@siemens.com

www.siemens.com/industry

Order No.: 103572281 SGR-01-111-014 (This replaces SGR-01-111-009)

Customer Care Toll free no. 1800 220 987 / 1800 209 0987 Email: adscs.india@siemens.com

Product upgradation is a continuous process. Hence, data in this datasheet is subject to change without prior notice. For the latest information, please get in touch with our Sales Offices.